



# AZOOD LED PANEL

## Technical Data



### Features



- Back-LIGHT LED Technology with high efficiency
- Housing: Metal Back Cover High reflection PET laminating
- Frame :Aluminum
- CRI: Ra>80
- Beam Angle: 120°
- Power Factor: >0.95
- Driver: Philips
- Driver Efficiency: >90%
- Surge Protection: 2KV
- Electrical: 220-240V, 50/60Hz
- Operating Temperature: -20~45°C
- Instant Full light
- Lifetime: 50,000H
- Switching Cycles :15,000
- Warranty:5 years



### Functions

On/off


### Optical options:

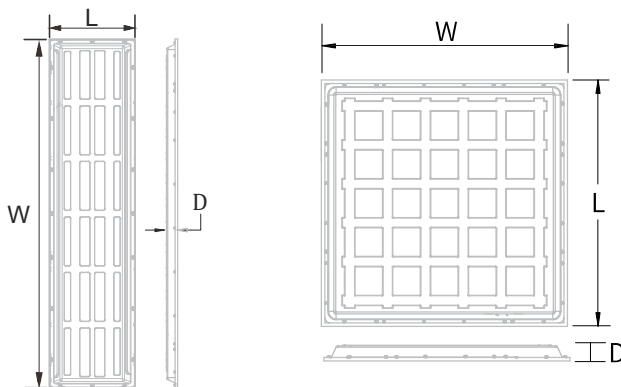

Model	Watt	Voltage	Lumen	Color Temp	CRI	IP	Dimension
AZ32P-0595-V600	32W	220~240V	4480LM	6500K	<80	IP20	L595* W595 *H30MM
AZ32P-0595-V400	32W	220~240V	4480LM	4000K	<80	IP20	L595* W595 *H30MM
AZ32P-0595-V300	32W	220~240V	4480LM	3000K	<80	IP20	L595* W595 *H30MM
AZ32P-0295-V600	32W	220~240V	4480LM	6500K	<80	IP20	L295*W1195*H30MM
AZ32P-0295-V400	32W	220~240V	4480LM	4000K	<80	IP20	L295*W1195*H30MM
AZ64P-1195-V600	64W	220~240V	8960LM	6500K	<80	IP20	L595*W1195*H30MM
AZ64P-1195-V400	64W	220~240V	8960LM	4000K	<80	IP20	L595*W1195*H30MM



# AZOOD LED WATER-PROOF



## Packing

Model	L*W*H (mm)	Inner Carton(mm)	QTY / INNER CTN	Outer Carton(mm)	QTY / Outer CTN	NW/CTN	GW/CTN
AZ32P-0595-V600							
AZ32P-0595-V400							
AZ32P-0595-V300							
AZ32P-0295-V600							
AZ32P-0295-V400							
AZ64P-1195-V600							
AZ64P-1195-V400							