




AZOOD DOB DOWN LIGHT

Technical Data

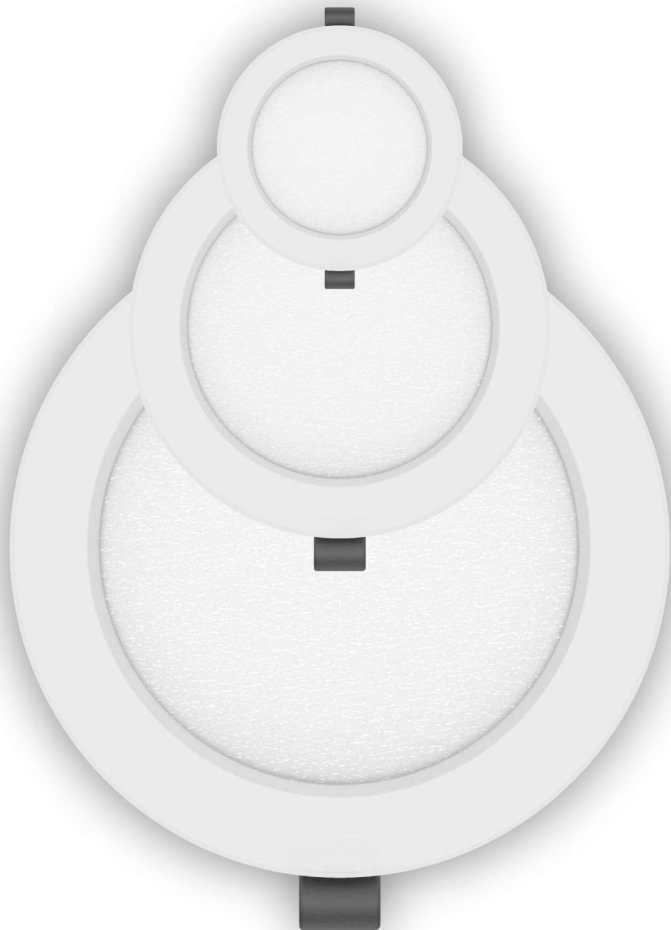

Features

Housing: Plastic

Led: SINAN (SMD)

CRI: Ra>80

Power Factor: >0.95

Driver: on bord (DOB)

Driver Efficiency: >90%

Protection: IP20

Surge Protection: 500V

Electrical: 110-240V, 50/60Hz

Storage Temperature: -20 : +60 °C

Working Temperature: -20 : +45°C


Working Humidity: 10 : 85

Lifetime: 30,000H

Functions

On/off

Optical options:



3,000h

3 YEARS WARRANTY

AZOOD DOB


LED SMD

Model	Watt	Voltage	Frequency	Current	Lumen	CRI	CCT	Lifetime	PF	Cut Out
AL04D-V00	3.5W	185-265V~	50/60Hz	0.04A	240Lm	80	6500K	30000H	0.5	76 mm
AL04D-V03	3.5W	185-265V~	50/60Hz	0.04A	240Lm	80	3000K	30000H	0.5	76 mm
AL15D-V00	15W	185-265V~	50/60Hz	0.14A	1200Lm	80	6500K	30000H	0.7	150 mm
AL15D-V04	15W	185-265V~	50/60Hz	0.14A	1200Lm	80	4000K	30000H	0.7	150 mm
AL20D-V00	20W	185-265V~	50/60Hz	0.26A	1700Lm	80	6500K	30000H	0.7	200 mm
AL20D-V04	20W	185-265V~	50/60Hz	0.26A	1700Lm	80	4000K	30000H	0.7	200 mm








Model: AL04D



Model: AL15D





Model: AL20D

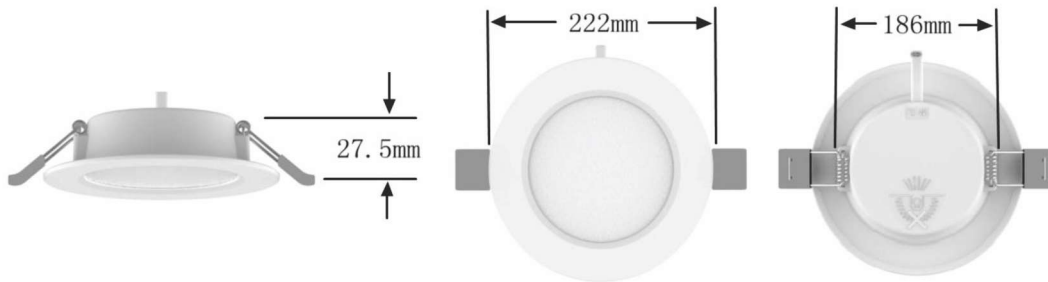

- If they are connected in series, the quantity should be less than 15 pieces and total current should be less than 1.0A.

Installation Instructions:

Model NO.	Cut Out
AL04D	76 mm
AL15D	150 mm
AL20D	200 mm



1. Open the hole as required size on the ceiling, as P-1.
2. Connect the L,N wire with AC power supply, as P-2.
- 3 The rating input current is 185 - 265 volt , (50/60 Hz).
4. Make sure the lamp has been well connect with power supply, then pull up the spring clip and put the lamp body inside the hole, as P-3.
5. Release your hand and finish installing, turn on the lamp for lighting. as P-4.

AZOOD DOB DOWN LIGHT



Packing Details

Model: AL04D

Parameters	Specification	Unit
Lamp Size	Φ98*25.5(Diam*H)	mm
Inner Box Size	100*30*100(L*W*H)	mm
Cutting Size	Φ75-80(Diam)	mm
Packing Size	490*325*225(Carton)	mm
Packing CBM	0.036	M ³
PCS/CTN	40	PCS
N.W. □ PCS □	/	kg
G.W. □ CTN □	/	kg
Installation	Recessed/Embedded	/

Model: AL15D

Parameters	Specification	Unit
Lamp Size	Φ175*26.5(Diam*H)	mm
Inner Box Size	178*31*178 □ L*W*H □	mm
Cutting Size	Φ144-154 □ Diam □	mm
Packing Size	510*375*200(Carton)	mm
Packing CBM	0.0383	M ³
PCS/CTN	20	PCS
N.W. □ PCS □	/	kg
G.W. □ CTN □	/	kg
Installation	Recessed/Embedded	/

Model: AL20D

Parameters	Specification	Unit
Lamp Size	Φ222*27.5(Diam*H)	mm
Inner Box Size	225*32*225 □ L*W*H □	mm
Cutting Size	Φ187-200 □ Diam □	mm
Packing Size	530*470*240(Carton)	mm
Packing CBM	0.06	M ³
PCS/CTN	20	PCS
N.W. □ PCS □	/	kg
G.W. □ CTN □	/	kg
Installation	Recessed/Embedded	/