


# LED Flood Light Series

## Technical Data PS 150 Series



### Features


- Housing: Die-cast Aluminum ADC12
- Thermal Conductivity: 96 W/m·K
- Led: Philips
- CRI: Ra>70 ( 80/90 for option)
- SDCM: <6
- Power Factor: >0,95
- THD: <15
- Driver: Sosen
- Driver Efficiency: >90%
- Protection: OTP, OCP, OVP, SCP
- Surge Protection: 4KV
- Ingress Protection : IP66
- Impact Test: IK08
- Electrical: 100-277V, 50/60Hz
- Operating Temperature: -40~55°C
- TM21: L80B10>50,000H
- Lifetime: 50,000H

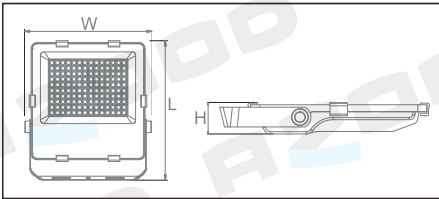

### Functions

DALI · 0/1~10V · Micro-wave · PIR

### Optical options:



Model	Power	Voltage	Frequency	Lumen	Color Temp	PF	IP	Dimension
AL10F-0354-V6PS	100W	AC100-277V	50/60Hz	15000LM	6500K	0.95	IP66	L354*W319*H53 MM
AL10F-0354-V4PS	100W	AC100-277V	50/60Hz	15000LM	4000K	0.95	IP66	L354*W319*H53 MM
AL15F-0400-V6PS	150W	AC100-277V	50/60Hz	22500LM	6500K	0.95	IP66	L400*W359*H63 MM
AL15F-0400-V4PS	150W	AC100-277V	50/60Hz	22500LM	4000K	0.95	IP66	L400*W359*H63 MM
AL20F-0430-V6PS	200W	AC100-277V	50/60Hz	30000 LM	6500K	0.95	IP66	L430*W389*H63 MM
AL20F-0430-V4PS	200W	AC100-277V	50/60Hz	30000 LM	4000K	0.95	IP66	L430*W389*H63 MM