


# LED High-Proof Light Series

## Technical Data



### Features

- Housing: PMMA
- Thermal Conductivity: 226 W/m·K
- Led: Bridgelux
- CRI: Ra>80
- SDCM: <6
- Power Factor: >0.90
- THD: <15
- Driver: Osram(Non-dim) / Lifud (dimmable)
- Driver Efficiency: >90%
- Protection: OTP, OCP, OVP, SCP Surge
- Protection: 2KV Ingress Protection : IP 69
- Impact Test: IK08
- Electrical: 220-240V, 50/60Hz
- Operating Temperature: -20~45C°
- TM21: L80B10>50,000H
- Lifetime: 50,000H

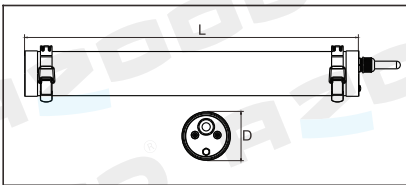

### Functions

ZigBee • PWM • DALI • 0/1~10V • Micro-wave

### Optical options:



150lm/w

5 YEARS WARRANTY

Osram Driver

Bridgelux LED

Power	Voltage	Lumen	CRI	IP	Dimension
20W	220~240V	3000LM	>80	IP69	L600*D81MM
40W	220~240V	6000LM	>80	IP69	L1200*D81MM
60W	220~240V	9000LM	>80	IP69	L1500*D81MM