


LED Tri-Proof Light Series

Technical Data



Features

- Housing: Plastic With Aluminum Inside
- Thermal Conductivity: 226 W/m·K
- Led: Bridgelux
- CRI: Ra>80
- SDCM: <6
- Power Factor: >0.95
- THD: <15
- Driver: OSRAM
- Driver Efficiency: >90%
- Protection: OTP, OCP, OVP, SCP
- Surge Protection: 2KV
- Ingress Protection : IP65
- Impact Test: IK08
- Electrical: 220-240V, 50/60Hz
- Operating Temperature: -20~40°C
- TM21: L80B10<50,000H
- Lifetime: 50,000H

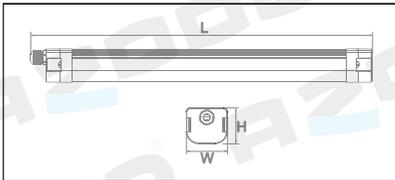

Optical options:



140lm/w

OSRAM DRIVER

Bridgelux LED

Functions

On/off

Model	Power	Voltage	Lumen	Color Temp	CRI	PF	IP	Dimension
AL20T-0060-V600	20W	220~240V	2800LM	6500K	>80	0.95	IP65	L659*W74*H64MM
AL20T-0060-V400	20W	220~240V	2800LM	4000K	>80	0.95	IP65	L659*W74*H64MM
AL20T-0060-V300	20W	220~240V	2800LM	3000K	>80	0.95	IP65	L659*W74*H64MM
AL40T-0120-V600	40W	220~240V	5600LM	6500K	>80	0.95	IP65	L1221*W74*H64MM
AL40T-0120-V400	40W	220~240V	5600LM	4000K	>80	0.95	IP65	L1221*W74*H64MM
AL40T-0120-V300	40W	220~240V	5600LM	3000K	>80	0.95	IP65	L1221*W74*H64MM
AL58T-0150-V600	58W	220~240V	8120LM	6500K	>80	0.95	IP65	L1502*W74*H64MM
AL58T-0150-V400	58W	220~240V	8120LM	4000K	>80	0.95	IP65	L1502*W74*H64MM
AL58T-0150-V300	58W	220~240V	8120LM	3000K	>80	0.95	IP65	L1502*W74*H64MM