

LED Post Top Garden Light Series


Technical Data

STREET & URBAN LIGHTING



Features

Housing: Die-cast Aluminum
 Thermal Conductivity: 96 W/m·K
 Led: OSRAM
 CRI: Ra>70
 SDCM: <6
 Power Factor: >0.95
 THD: <15
 Driver: Mean well
 Driver Efficiency: >93%
 Protection: OTP, OCP, OVP, SCP
 Surge Protection: 10 KV
 Ingress Protection: IP 66
 Impact Test: IK08
 Electrical: 100-277V, 50/60Hz
 Operating Temperature: -40~55°C
 TM21: L90B10>50,000H
 Lifetime: 60,000H

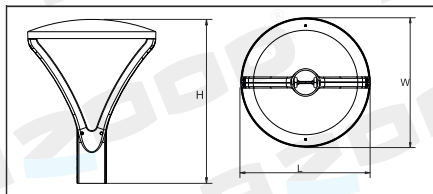

Functions

PWM · DALI · 0/1~10V

Optical options:



Model	Power	Voltage	Frequency	Lumen	Color Temp	PF	IP	Dimension
AL030G-000-V300	30W	AC100-277V	50/60Hz	4500 lm	3000K	0.95	IP66	L422*W422*H539mm
AL030G-000-V400	30W	AC100-277V	50/60Hz	4500 lm	4000K	0.95	IP66	L422*W422*H539mm
AL030G-000-V600	30W	AC100-277V	50/60Hz	4500 lm	6500K	0.95	IP66	L422*W422*H539mm
AL060G-000-V300	60W	AC100-277V	50/60Hz	9000 lm	3000K	0.95	IP66	L422*W422*H539mm
AL060G-000-V400	60W	AC100-277V	50/60Hz	9000 lm	4000K	0.95	IP66	L422*W422*H539mm
AL060G-000-V600	60W	AC100-277V	50/60Hz	9000 lm	6500K	0.95	IP66	L422*W422*H539mm
AL090G-000-V300	90W	AC100-277V	50/60Hz	13500 lm	3000K	0.95	IP66	L422*W422*H539mm
AL090G-000-V400	90W	AC100-277V	50/60Hz	13500 lm	4000K	0.95	IP66	L422*W422*H539mm
AL090G-000-V600	90W	AC100-277V	50/60Hz	13500 lm	6500K	0.95	IP66	L422*W422*H539mm