



LED SOLAR STREET LIGHT RW SERIES



Technical Data

ALL IN ONE



Features

- Housing: Die-cast Aluminum
- LED: SanAn
- Battery Type: Lithium
- Solar Panel: Mono Solar Panel
- Charging Time: 5-7 Hours
- Discharging Time: 12-15 Hours
- Working Modes: Remote Control
- Installation Height: 3-6M as per Model
- Rainy/Cloudy Days: 3-5 rainy or cloudy days
- Thermal Conductivity: 96 W/m·K
- CRI: Ra>70
- SDCM: <6
- Ingress Protection : IP65
- Impact Test: IK08
- Operating Temperature: -40~50°C
- Lifetime: 50,000H

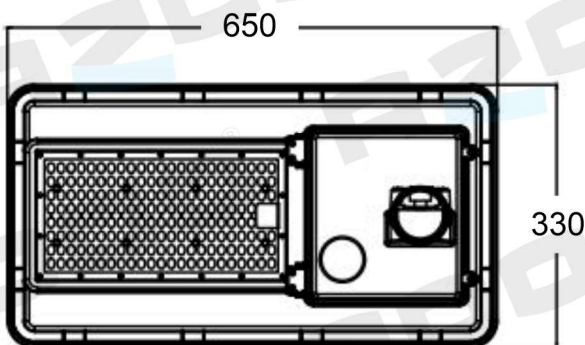

Functions

ON/OFF Photocell

Optical options:



120°

Model	Solar Power	LED Chips	Battery	Lumen	Color Temp	LED Board	Dimension
AZ035-S0650-V300	5V35W	180	3.2V40Ah	3200	3000K	1	L650xW330xH140MM
AZ035-S0650-V400	5V35W	180	3.2V40Ah	3200	4000K	1	L650xW330xH140MM
AZ035-S0650-V600	5V35W	180	3.2V40Ah	3200	6500K	1	L650xW330xH140MM