

AZ000®

LED DOWN LIGHT

Technical Data



610 SERIES

Features

Housing: Marine grade Diecast Aluminium alloy

LED: CREE XTE

Driver: Eaglerise

CRI: Ra>80

SDCM:<5

LED Qty.: 8PCS

Power Factor: >0.82

THD: <15%

Protection: OTP. OCP. OVP.SCP

Surge Protection: 2KV

Ingress Protection: IP65





Impact Test: IK10

Electrical: AC220-240V. 50/60Hz

Operating Temperature: -25~55°C

Operating Humidity : 10%~90%


Lifetime: 50,000H

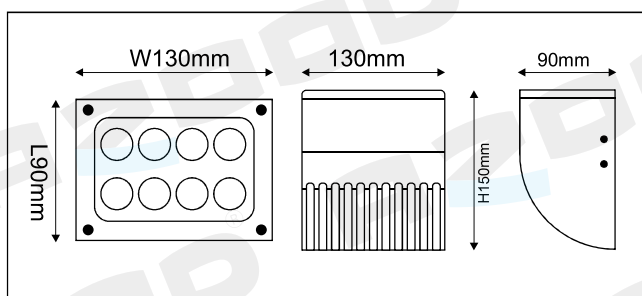

Functions

On/Off - DALI Dimmable

Optical options:



Beam: 10°, 15°, 25°, 30°, 40°, 45°, 60°, 90°

3 YEARS WARRANTY

CREE XTE LED

EAGLERISE DRIVER

Model	Power	Voltage	Frequency	Lumen	Color Temp	CRI	PF	IP	Dimension
AL010DL-130-V220	10W	AC220-240V	50/60Hz	700lm	2200K	>80	0.82	IP65	L90×W130×H150mm
AL010DL-130-V270	10W	AC220-240V	50/60Hz	700lm	2700K	>80	0.82	IP65	L90×W130×H150mm
AL010DL-130-V300	10W	AC220-240V	50/60Hz	700lm	3000K	>80	0.82	IP65	L90×W130×H150mm



LED DOWN LIGHT

Technical Data



610 SERIES

Features

Housing: Marine grade Diecast Aluminium alloy

LED: CREE XTE

Driver: Eaglerise

CRI: Ra>80

SDCM:<5

LED Qty.: 8PCS

Power Factor: >0.82

THD: <15%

Protection: OTP. OCP. OVP.SCP

Surge Protection: 2KV

Ingress Protection: IP65





Impact Test: IK10

Electrical: AC220-240V. 50/60Hz

Operating Temperature: -25~55°C

Operating Humidity : 10%~90%


Lifetime: 50,000H

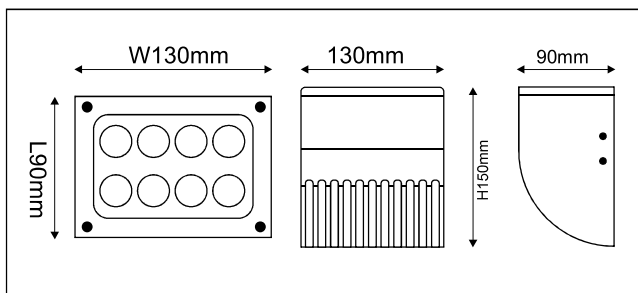

Functions

On/Off - DALI Dimmable

Optical options:



Beam: 10°, 15°, 25°, 30°, 40°, 45°, 60°, 90°

3 YEARS WARRANTY

CREE XTE LED

EAGLERISE DRIVER

Model	Power	Voltage	Frequency	Lumen	Color Temp	CRI	PF	IP	Dimension
AL010DL-130-V220	10W	AC220-240V	50/60Hz	700lm	2200K	>80	0.82	IP65	L90×W130×H150mm
AL010DL-130-V270	10W	AC220-240V	50/60Hz	700lm	2700K	>80	0.82	IP65	L90×W130×H150mm
AL010DL-130-V300	10W	AC220-240V	50/60Hz	700lm	3000K	>80	0.82	IP65	L90×W130×H150mm